

**TABLE OF CONTENTS**

- 1.0 Scope
- 2.0 Product Description
  - 2.1 Product Name and Attributes
  - 2.2 Dimensions, Materials, Platings and Markings
  - 2.3 Features and Benefits
- 3.0 Applicable Documents and Specifications
- 4.0 Safety Agency Approvals
- 5.0 Ratings / Performance / Validation
- 6.0 Packaging
- 7.0 Gages and Fixtures
- 8.0 Other Information / Miscellaneous


REVISION: <b>B</b>	ECR/ECN INFORMATION: EC No: <b>106659</b> DATE: <b>07 / 14 / 2016</b>	TITLE: <b>CTX64 MAT SEAL RECEPTACLE TERMINAL</b>	SHEET No. <b>1 of 5</b>
DOCUMENT NUMBER: <b>PS-502306-001</b>	CREATED / REVISED BY: <b>J.Burgio</b>	CHECKED BY: <b>J.Pruneau</b>	APPROVED BY: <b>T.Smith</b>

## CTX64 MAT SEAL RECEPTACLE TERMINAL

### 1.0 SCOPE

This Product Specification covers the Tin and Silver plated CTX64 Mat Seal Receptacle Terminal crimped to an array of wires utilizing crimp technology.

### 2.0 PRODUCT DESCRIPTION

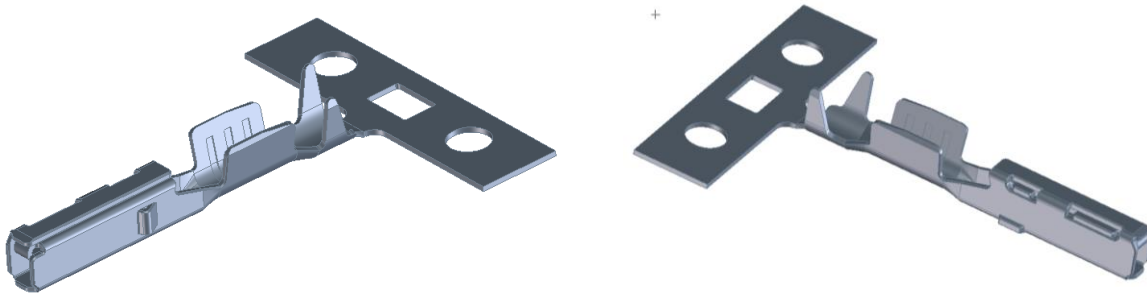

### 2.1 PRODUCT NAME AND ATTRIBUTES

Terminal Family	Gender	Sealing	Plating	Grip Size	Special Characteristics	Current Rating
CTX64	Receptacle	Mat Seal	Sn	S	Standard Performance Sn	1.5A
CTX64	Receptacle	Mat Seal	Ag	S	High Performance Ag	8A
CTX64	Receptacle	Mat Seal	Sn	S	High Performance Sn	8A
CTX64	Receptacle	Mat Seal	Sn	L	Standard Performance Sn	2A
CTX64	Receptacle	Mat Seal	Ag	L	High Performance Ag	10A
CTX64	Receptacle	Mat Seal	Sn	L	High Performance Sn	10A

### 2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

All dimensions, terminal materials, plating descriptions and ID locations can be found on the applicable sales drawing.

### 2.3 FEATURES AND BENEFITS

- High performance copper alloy
- One piece terminal design
- Accepts 0.64mm square blade
- Molex cavity compatible (Dual polarization terminal)
- Yazaki RH cavity compatible (Single polarization terminal)
- High current carrying capability (High Performance version [HP])
- All terminals validated to USCAR-21 and PSA STE 96341150 99 crimp performance requirements across a wide array of wires
- All terminals validated to USCAR-2 and PSA B21 7050 terminal performance requirements

REVISION: <b>B</b>	ECR/ECN INFORMATION: EC No: <b>106659</b> DATE: <b>07 / 14 / 2016</b>	TITLE: <b>CTX64 MAT SEAL RECEPTACLE TERMINAL</b>	SHEET No. <b>2 of 5</b>
DOCUMENT NUMBER: <b>PS-502306-001</b>	CREATED / REVISED BY: <b>J.Burgio</b>	CHECKED BY: <b>J.Pruneau</b>	APPROVED BY: <b>T.Smith</b>

### 3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

Description	Document Number
Sales Drawing	SD-34803-002
Application Specification (Crimp)	AS-502306-002
Packaging Specification	SD-31301-053 PK-31301-053

### 4.0 SAFETY AGENCY APPROVALS

Agency	Approval Status
CSA File Number	Not Applicable
TUV License number	Not Applicable
UL File Number	Not Applicable
IMDS	Available upon request
Environmental Compliance	Available on molex.com

### 5.0 RATINGS / PERFORMANCE / VALIDATION

#### 5.1 ELECTRICAL

Item	Description	Condition	Rating
5.1.1	Operating Voltage	Applied voltage during operation	14 Volts DC Maximum
5.1.2	Crimp Resistance	Post environment crimp resistance	Change in crimp resistance ≤ 1.0mΩ


#### 5.1.3 TERMINAL CURRENT DERATING CURVES

This test is used to determine the maximum test current at which a terminal system can operate in a room temperature environment before excessive thermal degradation and/or resistance begins to occur. Temperature Rise (Y axis) vs. Current (X axis) shall be plotted for each applicable conductor size.


CAUTION: These graphs are NOT to be used for actual terminal application in a vehicle. This test is conducted on terminals alone, thus eliminating the variation that may be introduced by variations in the heat dissipating characteristics of differing connector housing designs and sizes. This test cannot establish the Maximum Current Capability of a specific terminal application. For specific applications, several factors other than current load must be considered (see SAE/USCAR-2 appendix F for more information).

REVISION: <b>B</b>	ECR/ECN INFORMATION: EC No: <b>106659</b> DATE: <b>07 / 14 / 2016</b>	TITLE: <b>CTX64 MAT SEAL RECEPTACLE TERMINAL</b>	SHEET No. <b>3 of 5</b>
DOCUMENT NUMBER: <b>PS-502306-001</b>	CREATED / REVISED BY: <b>J.Burgio</b>	CHECKED BY: <b>J.Pruneau</b>	APPROVED BY: <b>T.Smith</b>

## 5.1.3.1 HP TIN & SILVER VERSION PSA DERATING CURVE

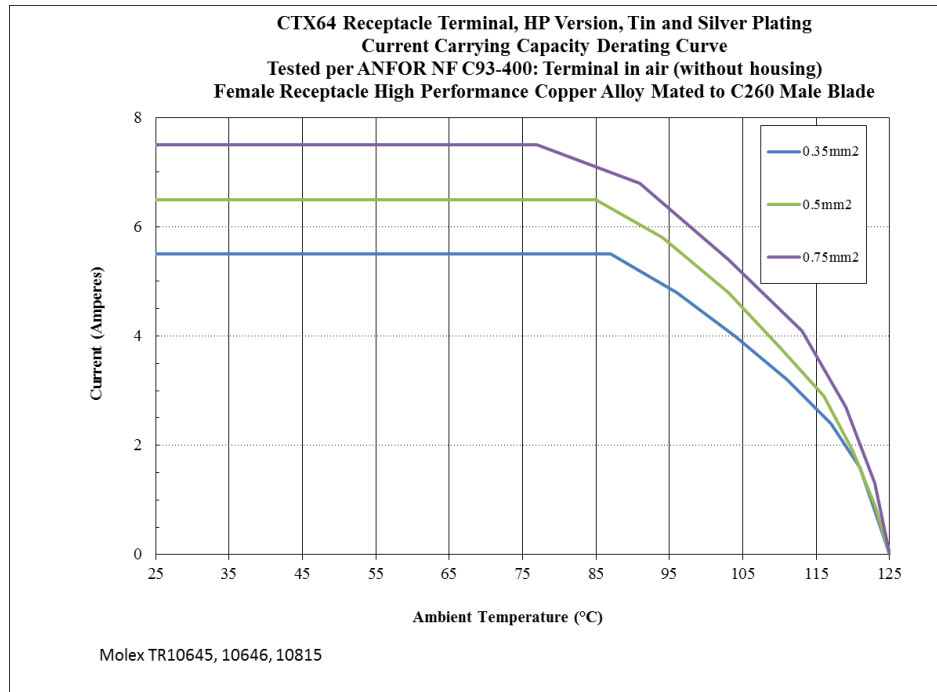

## USCAR DERATING CURVE

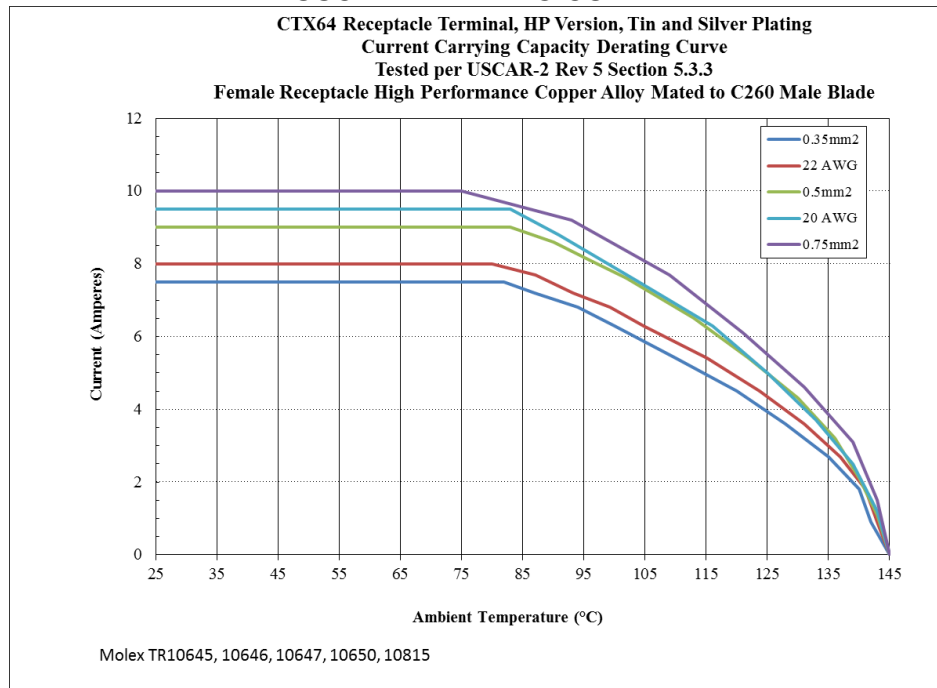

REVISION: <b>B</b>	ECR/ECN INFORMATION: EC No: <b>106659</b> DATE: <b>07 / 14 / 2016</b>	TITLE: <b>CTX64 MAT SEAL RECEPTACLE TERMINAL</b>	SHEET No. <b>4 of 5</b>
DOCUMENT NUMBER: <b>PS-502306-001</b>	CREATED / REVISED BY: <b>J.Burgio</b>	CHECKED BY: <b>J.Pruneau</b>	APPROVED BY: <b>T.Smith</b>

DERATING CURVES ARE VALID ONLY FOR HP TIN AND SILVER TERMINALS. STANDARD TIN TERMINALS DO NOT MEET USCAR 1008H CURRENT CYCLING REQUIREMENTS.

## 5.2 TEMPERATURE

Non-operating temperature: - 40°C to +125°C

Operating temperature: - 40°C to +125°C

**\*\*For terminal validation information contact your Molex Sales Engineer**

**\*\*For connector system level performance see related product specification**

## 6.0 PACKAGING

Parts are packaged to protect against damage during handling, transit and storage. Please refer to PK-31300-516 for reel wind direction. Terminals on reels should be stored in original packaging until ready for use. Storage temperature is recommended between 65 and 95°F (18 and 35°C) and storage humidity at less than 85% relative humidity. Under these conditions Molex recommended shelf life is 12 months from manufacturing date on terminal reel.

## 7.0 GAGES AND FIXTURES

Gages and Fixtures are referenced in the appropriate control plans of the receptacle terminals. For terminal electrical checking, please refer to the related connector application specification.

## 8.0 OTHER INFORMATION / MISCELLANEOUS

MOLEX REPRESENTS AND WARRANTS TO BUYER FOR A PERIOD OF ONE (1) YEAR FROM THE DATE OF DELIVERY OF THE PRODUCTS THAT:

- 1) THE PRODUCTS SHALL CONFORM TO THE MOLEX SPECIFICATIONS FOR THE PRODUCTS IN FORCE AT THE DATE OF DELIVERY OF THE PRODUCTS TO BUYER, AND
- 2) THE PRODUCTS SHALL BE FREE FROM DEFECTS IN MATERIALS AND MANUFACTURING.

EXCEPT AS EXPRESSLY PROVIDED ABOVE, MOLEX MAKES NO WARRANTY, EXPRESS OR IMPLIED, REGARDING THE PRODUCTS. ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE, ARE HEREBY DISCLAIMED. IN ADDITION, MOLEX EXPRESSLY DISCLAIMS ANY WARRANTY OBLIGATIONS IN THOSE INSTANCES WHERE THE FAILURES RESULTED FROM THE MODIFICATION OF THE PRODUCTS BY BUYER OR ITS CUSTOMERS, IMPROPER HANDLING, USE OR INSTALLATION OF THE PRODUCTS BY BUYER OR ITS CUSTOMERS, OR ANY OTHER CAUSE BEYOND THE CONTROL OF MOLEX.

REVISION: <b>B</b>	ECR/ECN INFORMATION: EC No: <b>106659</b> DATE: <b>07 / 14 / 2016</b>	TITLE: <b>CTX64 MAT SEAL RECEPTACLE TERMINAL</b>	SHEET No. <b>5 of 5</b>
DOCUMENT NUMBER: <b>PS-502306-001</b>	CREATED / REVISED BY: <b>J.Burgio</b>	CHECKED BY: <b>J.Pruneau</b>	APPROVED BY: <b>T.Smith</b>